

Instructions for:

BSDS113 DELUXE SCROLLING & RETRACTOR DISPLAY - Part 1


DO NOT remove the pin from the side of the retractor until you reach the appropriate step in the directions.

Important: This process is best accomplished on a large horizontal surface with two people.

To Begin-

Remove the contents from the carrying case. In it you will find the floor control unit, the top bar, two shock-corded bars and power cord with transformer.

Note: Design and print the banner to accommodate the 6 to 8 inches that are rolled up inside the base for the retractor.

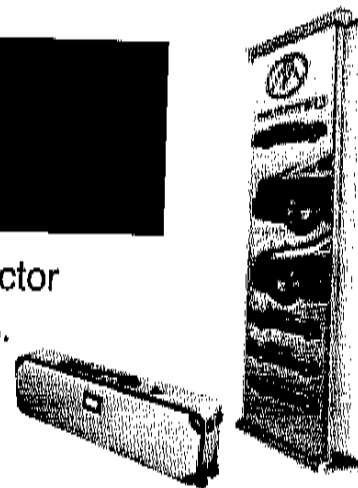

RETRACTOR STEP 1


Open the header by removing the end caps. Place the edge of your cut banner inside the header and snap it closed. Replace the end caps.

RETRACTOR STEP 2


Lay the banner out flat, right side down. On the retractor base you will find a strip of paper. Remove the paper to expose the adhesive.

RETRACTOR STEP 3

Firmly and evenly press the bottom of the banner to the adhesive.




RETRACTOR STEP 4

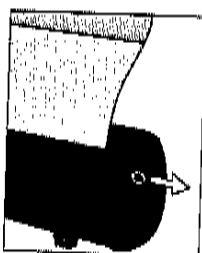

Maintain tension on the banner while slowly removing the pin. Allow the banner to gently roll into the canister.

RETRACTOR STEP 5

Assemble the shock-corded support bars and insert them into the base.

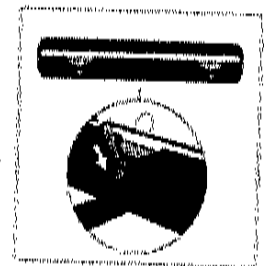

RETRACTOR STEP 6

When you are ready to display the banner, gently pull the banner out of the canister. Attach the header bar to the top of the support bars by fitting it onto the lips.


RETRACTOR STEP 7

When you are ready to retract the banner, simply lift the banner off the support bar and let it slowly wind into the base.

* See other side for Scroller instructions.

Instructions for:
**BSDS113 DELUXE SCROLLING &
 RETRACTOR DISPLAY - Part 2**

Important: This process is best accomplished on a large horizontal surface with two people.

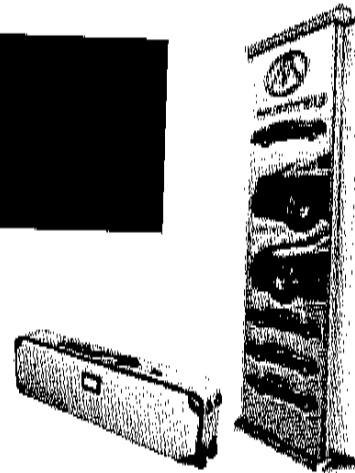

SCROLLER STEP 1

Join ends of a 33.5" x 158" banner together and connect on the back side with a piece of banner tape. **Do not overlap the banner edges.**

SCROLLER STEP 4

Slide the opposite end of the banner over the top roller and place the top roller back in the top header.




SCROLLER STEP 2

Gently remove the rollers from the header bar and the base. The roller bars are spring loaded for easy removal.

SCROLLER STEP 5

Place the top roller on the support bars. Adjust the height and tension of the graphic by turning the pole top segment.

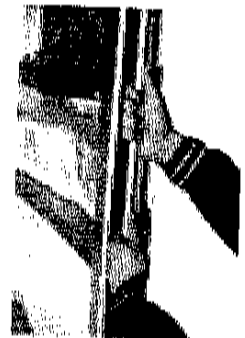

SCROLLER STEP 3

Slide the banner on the bottom roller and insert bottom roller back into base.



SCROLLER STEP 6

Plug into a power source and switch on.

* See other side for Retractor instructions.