

uniquely different



# NuVista® TILES

by dinoflex



Recycled  
Rubber Flooring

patios

rooftops

walkways

landscapes



## Dinoflex Exterior Surfacing

Performance proven in the harshest freeze/thaw climatic conditions, Dinoflex recycled rubber tiles and pavers provide a durable, resilient, impact and sound absorbing surface ideal for new construction as well as renovation projects. Environmentally friendly and sustainable; our Exterior recycled rubber products are the right choice for high performance green landscaping and for rejuvenating old surfaces.

### Commercial and Residential Applications:

- Green roofs
- Entryways
- Rooftops
- Porches
- Landscapes
- Stair treads
- Walkways
- Patios
- Gardens
- Decks



## Colors:


### Pigment\*



Black



Terra Cotta Red\*



Forest Green\*



Stone Beige\*




Teak Brown\*




Blue Ember\*

\*Variation in color occurs in all pigmented products. Pigmented tiles are not recommended for high traffic areas because of potential pigment loss.


### EPDM Speckled




25% Orange




25% Red



25% Green




25% Beige




25% Brown


**Note:** Please select colors based on actual samples.



50% Orange



50% Red




50% Green



50% Beige




50% Brown




75% Orange




75% Red



75% Green



75% Beige



75% Brown

## Customize your Color *The Color Innovator*



Black

+




Red

+



Beige

+



Brown

=



**Note:** Variation in UV stability can occur. The printed colors are reproduced as closely as possible to the actual product. Please contact your sales representative for more information.

Color blends available in concentrations up to 80% color

## Accessories:



Cushionwalk  
3/4" Reducer Strip



DinoGrip Adhesive  
(4 gallon)



Finishing Kit



# NuVista® TILES

by dinoflex



NuVista® Tiles provide superior noise reduction and high traction surfacing for rooftop patios, decks or walkways for apartment complexes, condominiums, office buildings, schools, restaurants and health care facilities. They can be installed over concrete, asphalt or a compacted granular base at grade, or over many types of roofing surfaces.

NuVista® Tiles also provide a non-vegetative border when used with green roof systems and can be used to create a high traction path to roof mounted mechanical systems. The recycled content combined with the regulation of water flow to roof drains, allow this product to contribute to LEED points.

## Features:

- Water permeable
- Will not crack/break in cold or hot weather
- Slip resistant even when wet
- Noise reducing
- Impact absorbing

## Benefits:


- Long life cycle
- Makes a fast and easy rejuvenation to old concrete patios
- Superior drainage for the regulation of water flow
- Reduces fall consequences
- Easy to maintain - sweep or hose off
- Beautifies previously unusable space
- Contributes to LEED credits






**Size:**

- 1" 24" x 24" = 4 ft<sup>2</sup>  
( 25 mm 61 cm x 61 cm = 0.37 m<sup>2</sup> 5.75 lbs/ft<sup>2</sup> )
- 1 3/4" 24" x 24" = 4 ft<sup>2</sup>  
( 44 mm 61 cm x 61 cm = 0.37 m<sup>2</sup> 5.75 lbs/ft<sup>2</sup> )
- 2 1/2" 24" x 24" = 4 ft<sup>2</sup>  
( 63 mm 61 cm x 61 cm = 0.37 m<sup>2</sup> 7.25 lbs/ft<sup>2</sup> )

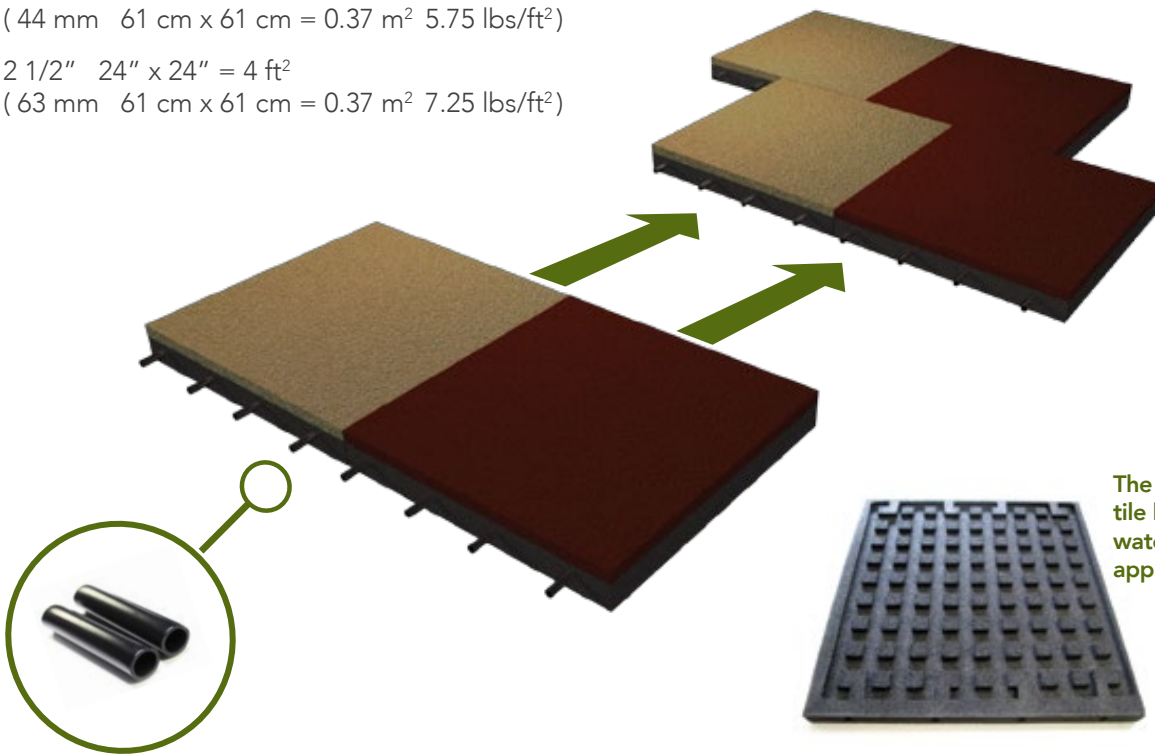

The raised design of the NuVista tile backing provides improved water flow, ideal for landscaping applications.

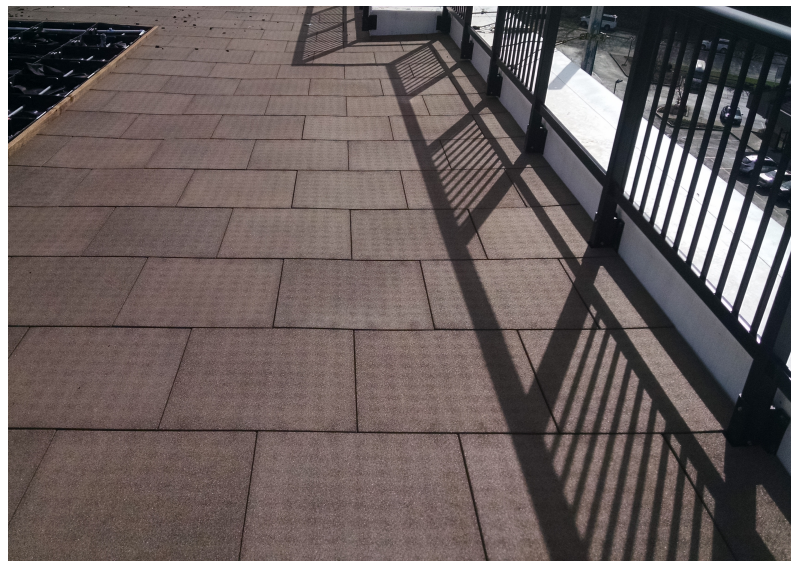

## Let Us Introduce Ourselves

Dinoflex has been a leading innovator in the manufacturing of recycled rubber products for over 25 years. We specialize in producing premium quality rubber flooring, exterior tiles and custom products. Our merchandise provides solutions for architects, designers and builders that are cost effective and environmentally friendly.

## LEED – Leadership in Energy and Environmental Design

Dinoflex recycled rubber products help qualify for LEED credits. Please refer to [www.dinoflex.com](http://www.dinoflex.com) for more information.

## NuVISTA® Tiles Technical Data

TEST	DESCRIPTION	NUVISTA® TILES
ASTM C1028	Static Coefficient of Friction	Dry – 0.73; Wet – 0.81 (Pigment Color)
ASTM C1028	Static Coefficient of Friction	Dry – 0.79; Wet – 0.81 (50% color)
ASTM D573	Aging Weathering	No effects

## 5 YEAR WARRANTY



Represented By:

Eco-\$mart, Inc. (941)376-8484 ph / [info@eco-smart.com](mailto:info@eco-smart.com)

Publication Date:  
September 2020