

Retrofit

ELECTRICAL

	SINGLE	DOUBLE
Power supply	230 V	230 V
Frequency	50 Hz	50 Hz
HP thermal power (Max.)	2,000 W	2,000 W
HP electrical input (Avg.)	500 W	500 W

WATER

	SINGLE	DOUBLE
maximum capacity	300 L	300 L
Target water temperature (Max.)	55°C	55°C
Operating pressure (Max.)	3 Bar	3 Bar
Connections (Compression)	3/4" male	3/4" male
Weight	30 Kg	31 Kg

REFRIGERATION


	SINGLE	DOUBLE
Refrigerant charge (R134a)	700 g	850 g
L.S operating pressure (Max.)	6 Bar	6 Bar
L.S operating pressure (Avg.)	1.5 Bar	1.5 Bar
H.S operating pressure (Max.)	28 Bar	28 Bar
H.S operating pressure (Avg.)	12 Bar	12 Bar
Connections (Flare)	3/8 Inch	3/8 Inch

DIMENSIONS SAHP Retrofit

	SINGLE	DOUBLE
1 Height	340 mm	340 mm
2 Width	440 mm	440 mm
3 Depth	340 mm	340 mm

Evaporator panel

	SINGLE	DOUBLE
4 Height	1700 mm	1700 mm
5 Width	800 mm	800 mm
Panel depth	25 mm	100 mm

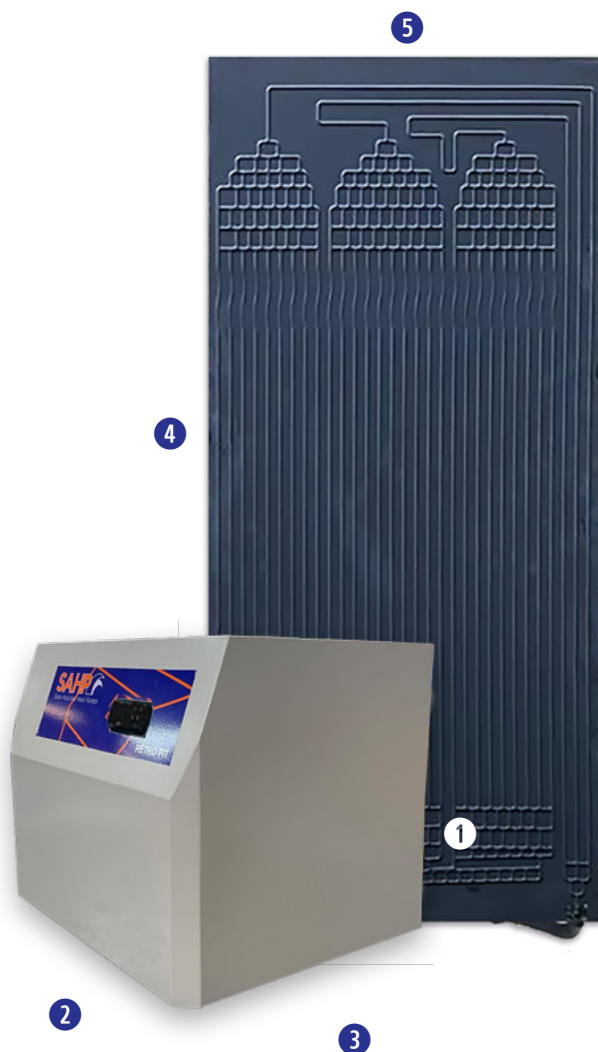

Clearances

Front 150 mm | Back 150 mm
Left 150 mm | Right 150 mm